

TRIUMF ISAC LINAC DEVELOPMENTS and UPGRADES

Z. T. Ang[†], T. Au, Y. Bylinski, K. Fong, J. Keir, D. Lang, R. Laxdal, R. Leewe,
B. Waraich, Z. Yao, Q. Zheng, V. Zvyagintsev

TRIUMF, 4004 Wesbrook Mall, Vancouver V6T 2A3, BC, Canada

Abstract

TRIUMF ISAC accelerator complex is in consists of ISAC-I room temperature linac and ISAC-II superconducting linac structure [1]. ISAC-I linac has seventeen RF systems in operation for about twenty years, and ISAC-II linac has forty superconducting QWR. The SRF cavities in operation for some about ten years. To match beam energy to RFQ, a small booster 3-gap structure at 11.78 MHz has been designed and installed in upstream of RFQ. A sliding mode extremum seeking control for LLRF control was developed and implemented in operation. Test results demonstrated very stable and reliable performs. Six of DTL systems have been working in the control mode. RFQ, two more DTL systems, HEBT and DSB bunchers, Rotator systems will be upgraded in the sliding mode control soon. The amplifiers for twenty ISAC-II QWR superconducting cavity SCB were developed and upgraded from YV-229 triode tube amplifier into a solid-state amplifier (SSA). The prototype and other four SSAs have been commissioned in 2017 and in operation over one year faithfully. The rest of 16 SSAs has been tested on bench at beginning of 2018. All twenty are in operation this year.

INTRODUCTION

The ISAC Linac of radioactive ions beams facility at TRIUMF have been in successfully operation for experiments many years. RFQ at 35.36 MHz to accelerate ions beam with $A/Q \leq 30$ from 2.03 keV/u to 153 keV/u and variable energy draft tube linac (DTL) at 106 MHz to accelerate the stripped ions beam of $A/Q \leq 7$ between 153 keV/u and 1.53 MeV/u. The designed capacity of beams energy for DTL to accelerate ions from 153 keV/u to 1.5 MeV/u with $A/Q \leq 6$. To meet the experiment requirements, some upgrades were done in DTL Tank number 3, number 4 and 5 in the RF power transmission line and final RF power amplifiers. The Tank 3 power amplifier outputs was increased to 20 kW from 16 kW after changing HCA 158-50 J coaxial semi-rigid transmission line to SPX communication technology 3-1/8" copper rigid transmission line. Tank 5 amplifier's high voltage transformer has been upgraded to 51 KVA from 36.6 KVA, which output power increased from 20.5 kW to 28 kW. Tank 4 amplifier's specified power level increased to 22 kW from 19 kW after re-tuning amplifiers setup limit trip points. The temperatures of the tuners and RF coupler windows are monitored, and the coarse tuners were setup to meet fine tuner working distances for all power levels. Table 1 shows the DTL amplifiers upgrading results:

[†]Email address: zang@triumf.ca

Table 1: DTL Amplifiers Output Power

System	Before	After upgrading
Tank 3	16 (KW)	19 (KW)
Tank 4	19 (KW)	22 (KW)
Tank 5	20.5 (KW)	28 (KW)

After the above upgrading for DTL RF systems there are more variable ions beams and beam energies could be delivered for experiments at TRIUMF.

RF BOOSTER

The 35.36 MHz RFQ is designed to accelerate beams with $A/Q \leq 30$ in CW. A three harmonic pre-buncher, located 5m upstream of the RFQ, operates with a fundamental frequency of 11.78 MHz so that one of every three RFQ buckets is filled with beams. The RFQ requires a beam injection energy at 2.03 keV/u for about 60% beam transmission. The injection energy acceptance of the RFQ requires that the ions beam must be extracted from a source at an electric potential up to about 60 kV. The ISOL target modules operate in a grim environment that can limit the source bias. Presently the ISAC target modules cannot hold higher than 54 kV and this value can degrade with time so that to schedule experiments for ions with $A > 25$ has a risk.

In order to accelerate high mass beams and to mitigate against further source bias degradation a small 3-gap RF structure cavity has been installed at upstream of RFQ. The effective voltage for the booster was specified 16 KV. A 7 KV effective voltage has been achieved for beam experiments. 2 KV, 4 KV and 6 KV effective voltage for ions beams of Carbon and Nitrogen have been tuned through RFQ at the designed transmissions respectively. Table 2 shows the effective voltages with RF power feeding to the primary coil in the RF circuit box. A stable operation could not be approached while effective voltages applied to beams higher than 8 KV.

Before we installed the RF structure and RF circuitry box in beam line, we powered the system to 150 W RF power through primary coils in RF Lab driven from a 300 watts CW amplifier. The forward and reflected RF powers were monitored. A stable RF performs off line tests gave us a confident to install it for beam test. Instead of real RF structure and feedthrough, we used two capacitors with equal capacitances to the feedthrough and draft tubes for the test and tuning resonance frequency. However, when we installed the structure in beam line to test with beams in vacuum, the effective voltage to beam is much lower from simulations and bench tests.

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

- Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)



Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)



Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

Content from this work may be used under the terms of the CC BY 3.0 licence (<https://creativecommons.org/licenses/by/3.0/>)

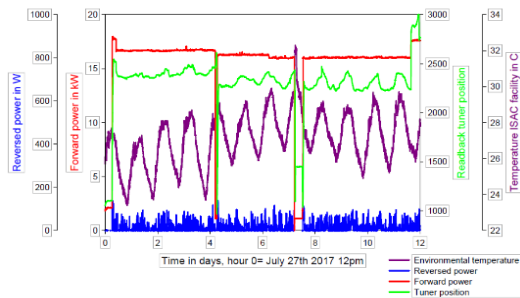


Figure 3: The forward, reflected powers vs. temperature while the sliding mode control implemented.

choose the controller parameters to guarantee stable system operation up to twice the cavity bandwidth, which is a controllable bandwidth improvement of a factor of two. The system first was carried on two of ISAC-I DTL Tank4 and 5 room temperature cavities and long-term measurements show that the system effectively counteracts the RF heating effect as well as diurnal temperature variations. Figure 4 shows how stable of Tank 5 at higher power level while sliding mode control applied.

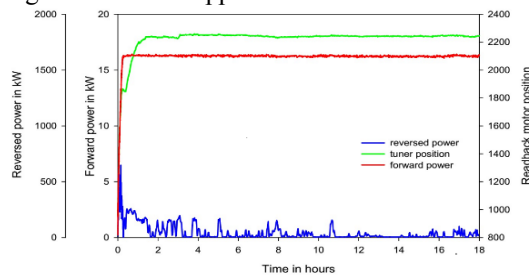


Figure 4: Forward, reflected power Vs. Temperature.

Except for above six DTL RF systems have been working in the sliding mode control, there are another six RF systems in ISAC-I linac will be upgraded in the sliding mode control soon.

ISAC-II SCB AMPLIFIERS

ISAC-II linac are consisting of 40 QWR superconducting cavities, 20 SCB cavities working at 106 MHz and 20 SCC at 141 MHz. SCC system is employing 20 solid-state amplifiers to power cavities. Twenty 600 W tube amplifiers power the SCB. The cavities operate in over coupled regimes with RF forward power up to 250 W CW; seven W is dissipating in the superconducting cavity and the rest of RF power reflected back to the amplifier. The amplifier output is connected with cavity via a 1000 W circulator, and all the reflected RF power is dissipated in a dummy load of the circulator.

The 600 W amplifier have two stage amplifiers. The 50 W pre-amplifier amounted on a heat sink with fan separated from the main amplifier in a chassis. It used a Motorola MRF-141G FET capable 150 watts output maximum. Main amplifier adopted YC-229 ceramic triode tube and employed a grounded grid circuit for the final amplifier. The performance of the amplifiers are not identical. Some of the amplifiers degraded fast, could not last one year, which affects routing operational efficiency a lot.

After last 10-year operation of the tube amplifiers in ISAC-II SCB, the disadvantages of the tube amplifiers are obviously comparison with SCC amplifiers. There are about 100 tubes being used since the SCB commissioned. Each tube costs more than 2000 US dollars. The major handicaps of the amplifier are as following:

- The degradation of the tube amplifiers is very fast.
- Tunings for matching and phases are often to make system operation ineffective.
- Costs to replace the failure/aged tubes are big for long term operations.
- Investigate failures of system is intricate.
- Time of replacing failed amplifier, pre-amplifier or DC power supply is not negligible for operation efficiency.

A 550 W solid-state amplifier for the replacement of the SCB tube amplifiers was developed in TRIUMF. The new amplifier performs met the operational requirements. So complete replacement of the tube amplifiers had been brought forward.

Based on the experience of homemade solid-state amplifier, BBEF produced a prototype amplifier for test and operation for experiments at TRIUMF, which was met our specifications and operation requirements. Then four amplifiers arrived TRIUMF for operation and commissioned in year 2016. The last seventeen amplifiers from BBEF shipped to TRIUMF at the end of 2017. All 20 SCB tube amplifiers were moved out from operations. The new SSAs have all been installed and commissioned for routine operation this year. Instead of individual DC power supply, pre-amplifier and final power amplifier, the new SSA is integrated power supply, pre-amplifier, final amplifier and control board all in one chassis. To replace a fail SSA is only a few minutes. Spare modules for SSA are swappable and easy to access.

CONCLUSIONS

ISAC-I linac RF system upgrading allow experiments having more choices of ions beams and beam energies. The developments and upgrades in ISAC linac RF system have increased the machine operational reliability and reduced beam down times.

REFERENCES

- [1] R.E. Laxdal, "ISAC-I and ISAC-II at TRIUMF: Achieved Performance and New Construction," in *Proc. LINAC2002*, Gyeongju, Korea, August 2002, paper TU302, pp. 294.
- [2] V. Zvyagintsev, "Novel RF structure for energy matching into an RFQ," in *Proc. 8th Int. Particle Accelerator Conf. (IPAC2017)*, Copenhagen, Denmark, May 2017, pp. 4111, doi:10.18429/JACoW-IPAC2017-THPIK003
- [3] A.K. Mitra, "RF Test and Commissioning of Low and High Beta Bunchers for the TRIUMF ISAC Facility" in *Proc. EPAC, 2002*, Paris, France, June 2002, pp. 2178.
- [4] R. Leewe, "Novel Scheme to Tune RF Cavities using Reflected Power," in *Proc. LINAC2016*, East Lansing, MI, USA, September 2016, paper THOP06, pp. 757, doi:10.1829/JACoW-LINAC2016-THOP06