

- ✧ Beam intensity with ACCT-1 and ACCT-2 before and after RFQ respectively.
- ✧ MEBT Test Chamber (MTC):
 - Intensity with FC.
 - X and Y transverse emittance with slit+slit+FC.
 - Beam transverse profile with slit+FC.
 - Longitudinal profile with a Fast Faraday Cup (FFC) whose time resolution can be 80 ps due to bandwidth limitation (12.5 GHz).
 - Energy with a Time of Flight (TOF) monitor based on two Beam Position Monitors (BPM) with a distance of 1068.9 mm between them.
 - Energy spread with a scattered particle monitor (unavailable) [2].

Source Results

Since 45 GHz FECR is still under development a 14.5 GHz room-temperature permanent magnetic ECR ion source LAPECRIU was employed for the commissioning of LEAF. Up to 5 emA He⁺, 1.5 emA He²⁺, 1.7 emA N²⁺ and 0.16 emA N⁵⁺ have been extracted from the source. In the initial commissioning the slits at the end of charge selection were throttled to confine the beam emittance. Figure 2 shows the measured beam emittance in the LTC 1# for a 90 eμA He⁺ beam at energy of 20 keV/q. The rms emittances in both directions are 0.05 π.mm.mrad.

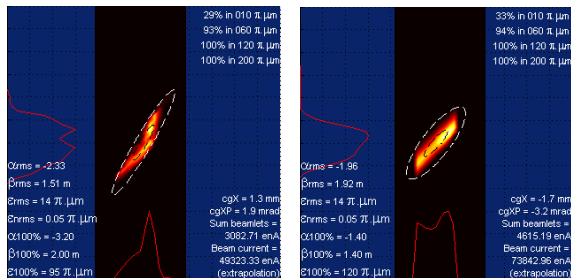


Figure 2: LEBT test chamber 1# emittance measurement for 90 eμA He⁺ beam, throttled slits.

Beam Transmission in LEBT Line

By having the beam parameters after charge selection, beam transmission simulation in the LEBT line was performed. Figure 3 gives the simulated result from LTC 1# to 3#. By adjusting the field gradients of the quadrupoles an approximately axisymmetric beam was obtained. We set the currents of the quadrupoles according to the simulation and measured the emittance in LTC 3#. The results are shown in Fig. 4. Beam current measurement indicates a 100% transmission in LEBT.

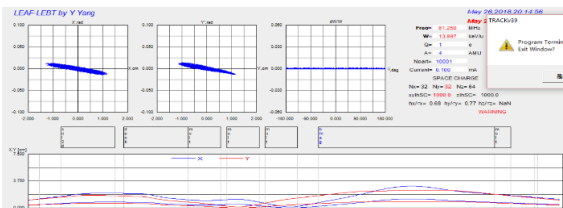


Figure 3: Beam transmission simulation in the LEBT line.

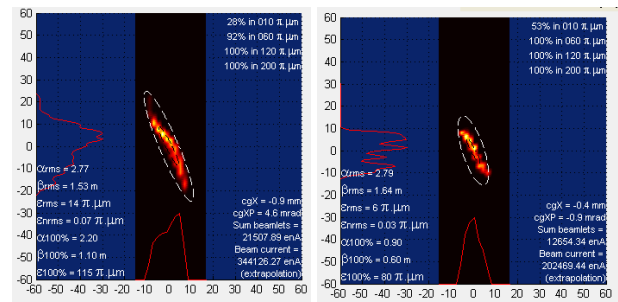


Figure 4: LTC 3# emittance measurement.

RFQ Commissioning and Beam Characteristics

Before entering the RFQ the beam was chopped by an electrostatic chopper that is installed in LTC 3#, so that the transmission efficiency of RFQ could be measured by two ACCTs situated on both sides of the RFQ. According to the current readings of ACCTs, as shown in Fig. 5, the measured transmission efficiency was ~98.5%. The accelerated particles could pass through the MEBT quadrupole triplet channel and be detected by the FC in MEBT test chamber while the non-accelerated ones would be lost in the focusing channel due to the widely different rigidity from the synchronous particles. The measured acceleration efficiency was ~46.5%. The low acceleration efficiency can be due to the factor that the MHB was not operational.

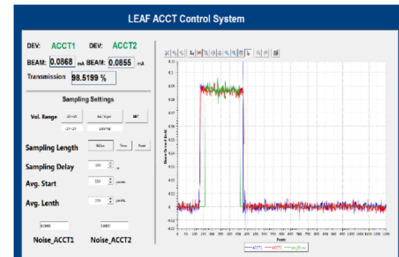


Figure 5: Current readings of two ACCTs.

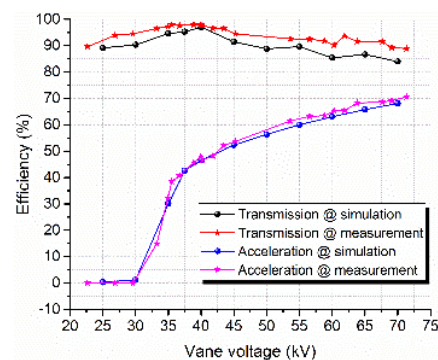


Figure 6: Measured and simulated RFQ transmission and acceleration efficiencies as a function of the vane voltage.

The RFQ transmission and acceleration efficiencies were measured as a function of the RFQ vane voltage (RF power). Figure 6 shows the measured results and the results simulated by TRACK for He⁺ beam. The figure demonstrates good agreement between the measurements and simulations. For the nominal voltage of 40 kV the transmission efficiency reaches maximum, while the

REFERENCES

- [1] J.C. Yang *et. al*, *Nucl. Instr. Meth. B*, vol. 317 (2013) 263-265.
- [2] V. A. Verzilov *et. al.*, in *Proc. DIPAC 2007*, Venice, Italy, paper WEPB07.